




**Purpose** To compare the mixing performance of the Xemex® Static Mixer with commercially available mixers.


**Experimental** The 2-part formulation was dispensed using Re Mixer’s automated cartridge dispenser, having preset flow rate and purge routines. After curing at room temperature for 66 hours, hardness was determined through a single-blind collection using Rex Gauge’s RX-DD Series Durometer, and in accordance with ASTM D2240.

# ResinLab® UR3001HP2-Black

## Cured Hardness

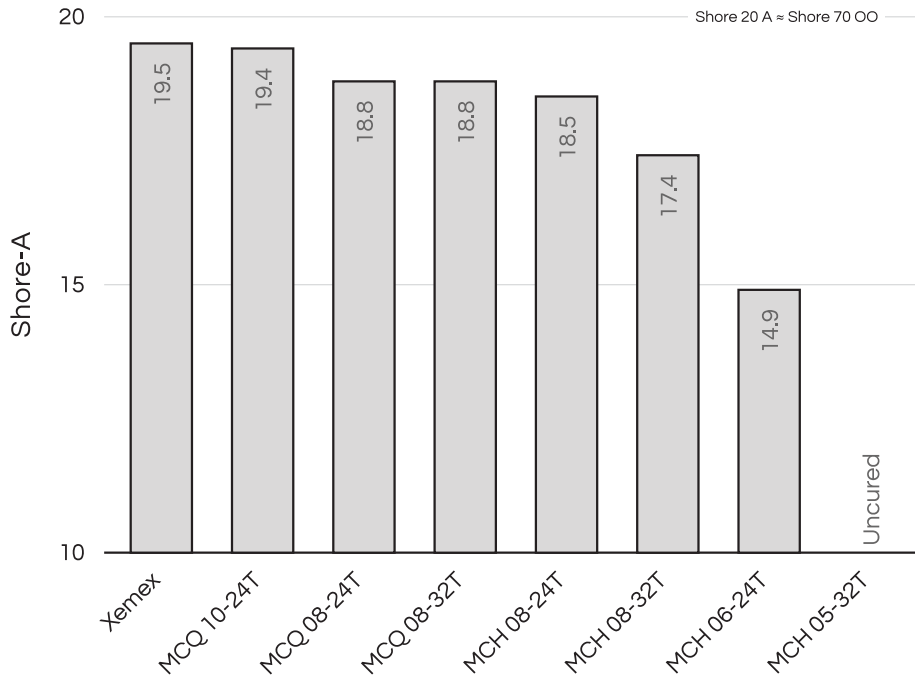

Relative Pressure\*

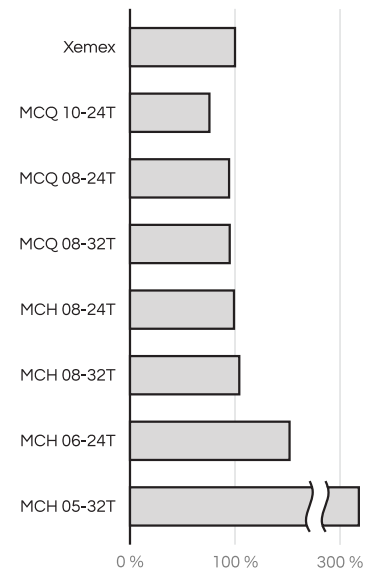

\*Normalized from 1.0 mL/s constant flow rate data

**Mixing Performance** The hardness data suggests that Xemex yielded excellent mixing performance for ResinLab® UR3001HP2 Black. With a retained volume of only 2.5 mL, Xemex outperformed mixers with 24 and 32 elements, which have retained volumes in the order of 5 to 10 mL. These results suggest that Xemex is a strong candidate to replace both helical and square mixers in applications using UR3001HP2.

**Back Pressure** From this data, one should expect back pressures with Xemex to be comparable to MCQ 08-32T or MCH 08-24T but lower than MCH 06-24T at equivalent flow rates.

Formulation	Type	Mix Ratio**	Mixed** (cP)	Part A**	Part B**	Pot Life** (min)	Keywords
ResinLab® UR3001HP2-Black	Urethane	1:1	2,100	200	4,500	3	—
Laboratory Technician	Cured Time	Laboratory		Report Prepared by			
Lukas Duddleston, MS	66 hours	23±2 °C   35±5 % RH		Lukas Duddleston, MS			

\*\*As reported in ResinLab’s Technical Data Sheet

THE DATA AND INFORMATION CONTAINED ON THIS REPORT IS FOR INFORMATIONAL PURPOSES ONLY. RE MIXERS, INC. HEREBY DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES REGARDING THE PRODUCTS, TEST RESULTS, DATA, AND INFORMATION CONTAINED IN THIS REPORT (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE, OR INFRINGEMENT), WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, OR OTHERWISE. In addition, while the data and information contained herein is believed to be reliable, all such data and information is provided “as-is”, “with all faults”, and no warranty is expressed or implied regarding the reliability, accuracy or completeness of the data, or the results to be obtained from the use thereof. All recommendations or suggestions for use are made without guarantee and it is the user’s sole liability and responsibility to test and determine any listed product’s suitability for their own purpose and application. ResinLab® is a registered trademark of Ellsworth Adhesives. Re Mixers, Inc. is not sponsored by Ellsworth Adhesives. Any use of ResinLab®, or other third party trademarks are for informational and/or comparative fair use purposes only.